


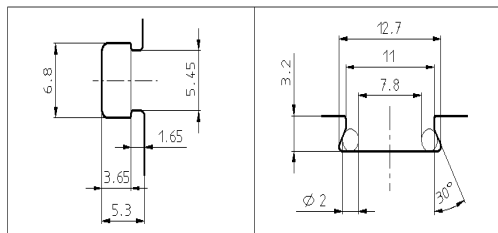


Tipos	Dimensiones (mm)					Peso (kg/m)	Codigo Eural	Observ.
	A	B	C	D	E			
	32 H11	32.5	44.5	17	---	2.154	990604	
	40 H11	38	50.5	23	---	2.456	990605	
	50 H11	46.5	60.3	26	---	3.326	981011	
	63 H11	56.5	70	37	35	3.383	990606	
	80 H11	72	87	45	45	5.110	990607	
	100 H12	89	106	50	46	5.507	990608	
	125 H12	110	132	56	50	7,632	990609	


Tapeta de fijacion

Ø32 – Ø100 → preparado para rosca de rodadura (para unión con tornillo)

Ø125 → Preparado para cabezas de tornillos.

Material	EN AW-6063 T6 extruido → calibrado → anodizado								
Composicion quimica	Si 0.20-0.60	Fe 0.35	Cu 0.10	Mn 0.10	Mg 0.45-0.90	Cr 0.10	Zn 0.10	Ti 0.10	Al resto
Caracteristicas mecanicas minimas	Rm = MPa 245		Rp 0.2 = MPa 200			A5% = 8		HBW = 80	
Anodizacion	- Espesor anodizado: clase 20 µm +10/-4 (interno) +10/-8 (externo) - Dureza de la superficie anodizada: 420 HV25 +130/-30								
Rugosidad interna	Ra radial ≤ 0.6 µm		Rmax radial ≤ 9 µm			Ra axial ≤ 0.4 µm			
Cantidad minima	Paquete aprox. 250 kg por diametro Dimensiones de los paquetes: approx. 500 x 500 x 3200 mm								